

Connecting Your Station To The World

Build A "Cloud Warmer" NVIS Antenna System

Gale-force winds had already started and our hurricane emergency communications net was in full swing. Radar data was coming in, pinpointing the eye of the storm and the track it was following.


Signals from the portable station at the radar site were difficult to copy for almost every station participating in the net, except two who had installed permanent Near Vertical Incidence Skywave (NVIS) antenna systems just a few days before the official June 1st beginning of the hurricane season.

The portable station was also using an NVIS system of sorts, because Crescencio, CO4BM, had decided to place the half-wave 40 meter dipole really close to the ground, as the weather station personnel had told him that it was very likely that the Punta del Este site would receive the full blast of the hurricane that was rapidly approaching.

After the storm was over, many amateurs started to ask me questions about why the NVIS systems had performed so well, delivering really strong signals, plus another very desirable characteristic for emergency communications: much less QSB (fading) at around sunrise and sunset, as one would get with standard half-wave dipoles installed at the typical 10 to 15 meters (30 to 45 feet) above ground.

First used by broadcasters in the tropics, the NVIS antenna has now become a standard for close-range communications via the ionosphere. Because it points your signal nearly straight up (note the "near vertical" in the name), this type of antenna has become affectionately known as a "cloud warmer." It is an ideal system for emergency communications on the 80 and 40 meter bands, and will provide regular net control stations with an outstanding signal.

Interest generated by the effectiveness of the NVIS system during hurricane emergencies led to the design of the antenna shown in fig. 1, which may be installed using a single mast or tower, as the two legs of the folded dipole slope gently at a not-too-critical angle, so the long Dacron™ rope insulators can be tied to short masts or the

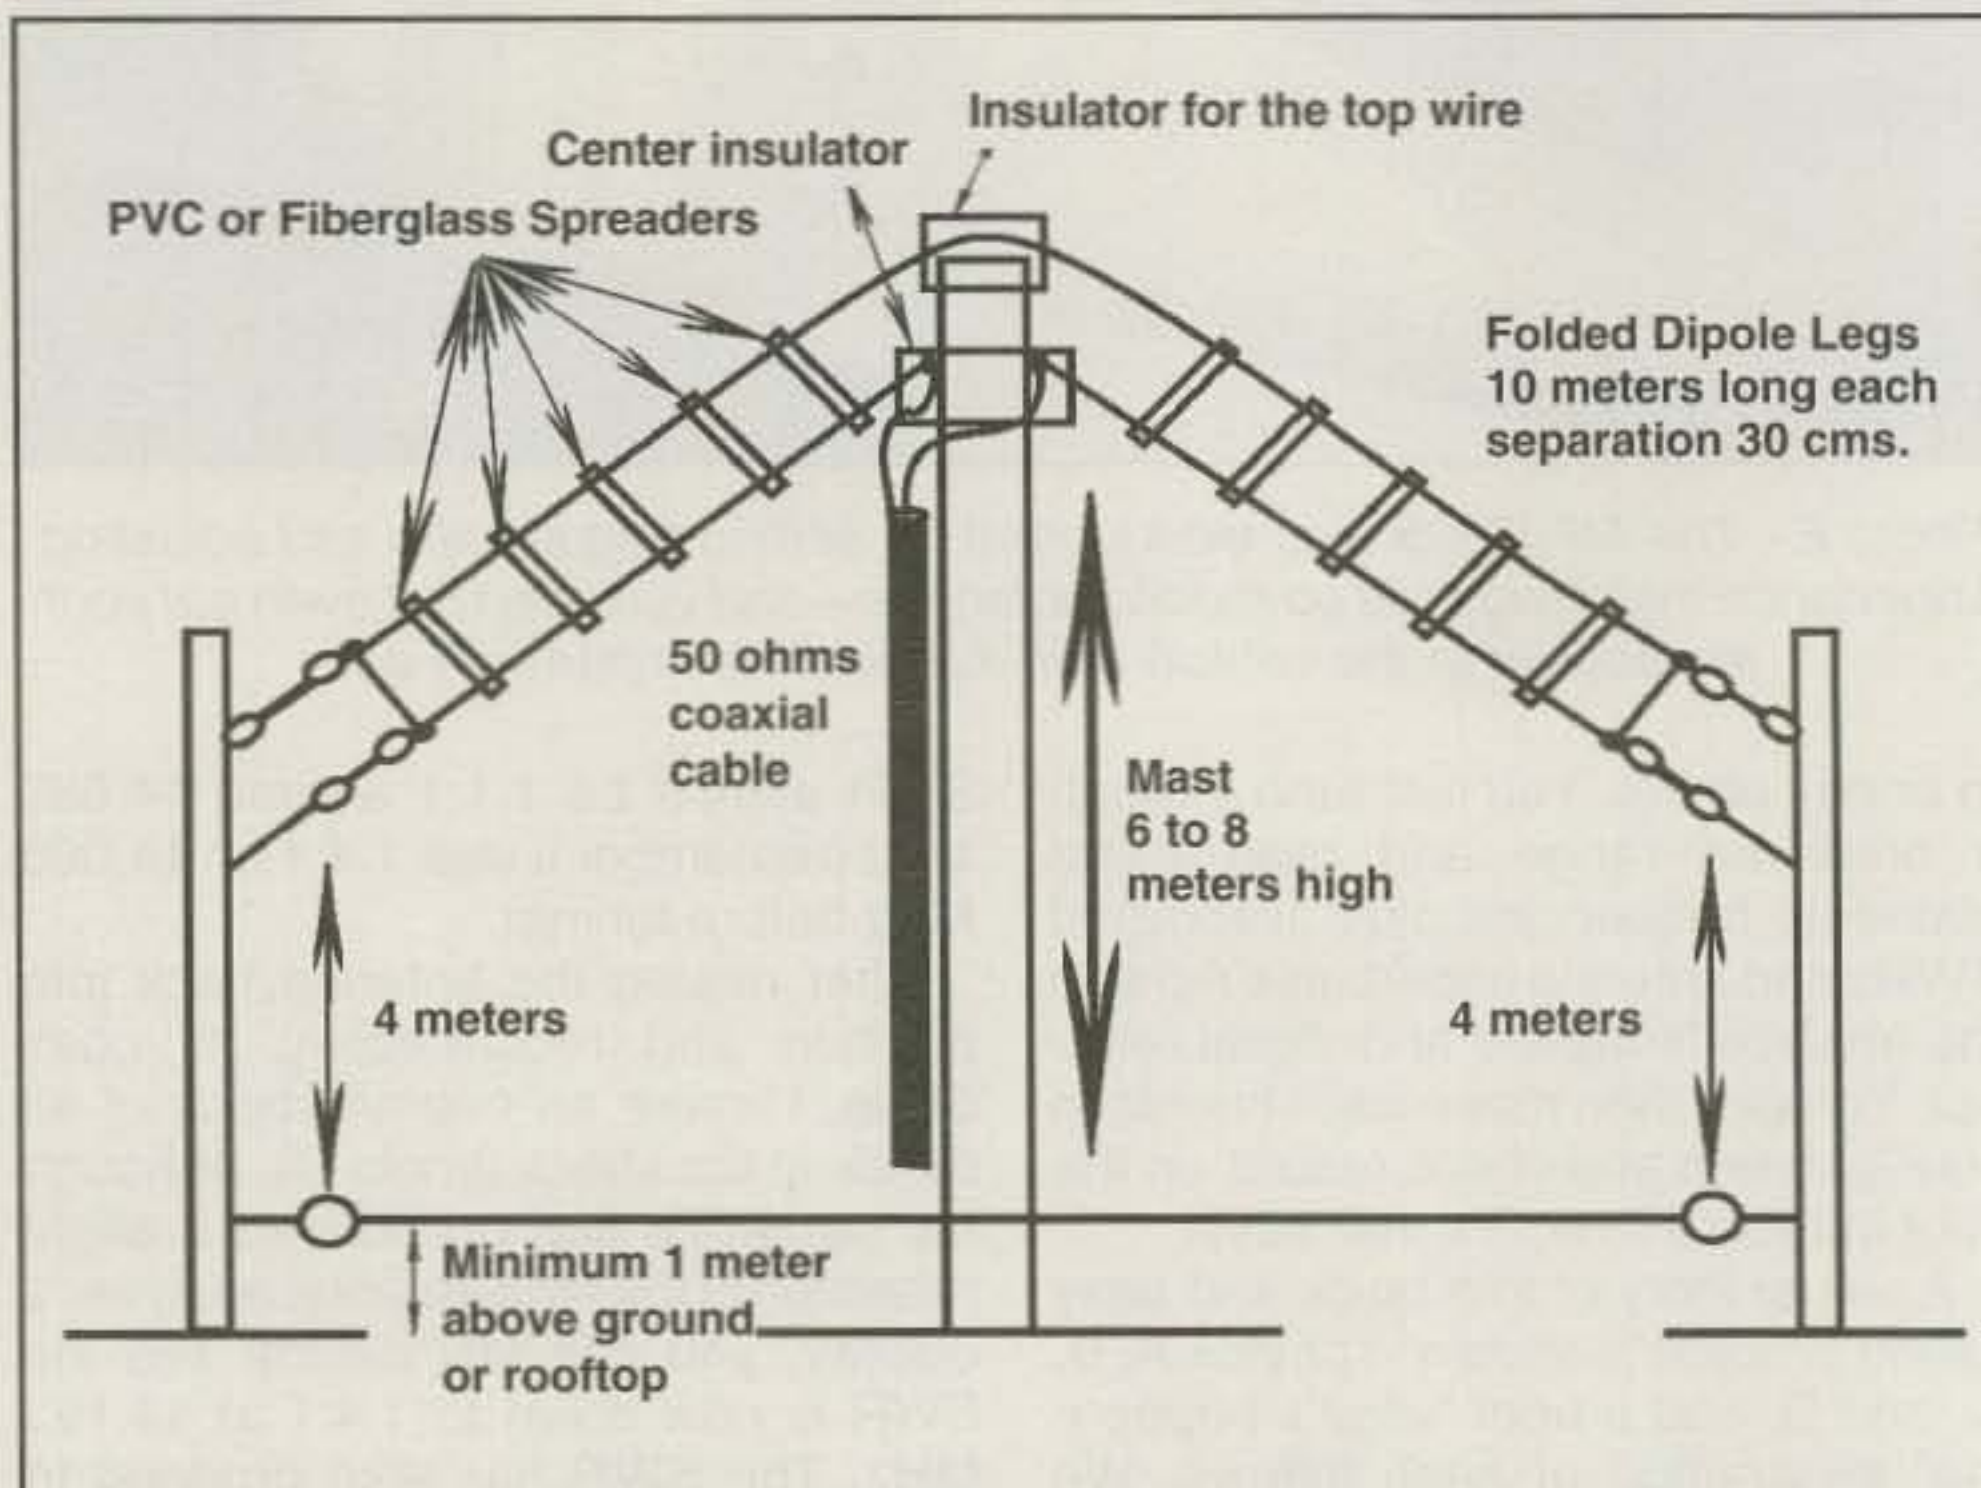

CO2KK's folded-dipole Near Vertical Incidence Skywave (NVIS), or "Cloud Warmer," antenna for 40 meters. The horizontal line near the bottom (1 meter off the ground) is the reflector. If fed with open-wire line, the same antenna is usable on 30 meters, and a similar antenna can be built for 80 meters. It is excellent for short-range communications, as in emergency or traffic nets. (Illustration by Olga Dalmau)

side of a building or maybe a conveniently located fence.

CO2KK's NVIS Folded-Dipole Plus Reflector System

At first glance, looking at fig. 1, you may ask, "Why use a folded dipole?"

The answer is very easy to explain. The CO2KK NVIS system uses a closely spaced tuned-reflector element, which considerably reduces the feedpoint impedance of the radiating element.

If you use a standard single-wire half-wave dipole, the typical feedpoint impedance will go as low as 10 ohms, and usually around 12 to 15 ohms, depending on the local objects within the antenna's near field. By using a *folded dipole* element, the 10 to 15 ohms impedance is quadrupled to between 40 and 60 ohms, a very convenient value for using the antenna with a 1:1 balun and a 50-ohm coaxial line. The use of the 1:1 balun is very important, as you don't

want feedline radiation to spoil your radiation pattern!

The CO2KK NVIS antenna can be built for permanent use by using fiberglass spreaders conveniently placed to keep the two wires that form the folded dipole at a constant spacing, and the 1:1 balun must be rated according to the power used by your station. I strongly recommend using an *air-core* balun, which can be homebrewed easily and will not saturate when running high power, as ferrite core ones tend to do.

Keep in mind that base stations operating during emergencies normally run near maximum legal power, even when using generators, as communications officials tend to agree that running the net control station at high power levels keeps the operating channel clear, something that is quite logical, to say the least.

Reports received over the past three years during which the antenna has been in operation show that the NVIS

Tuning the Reflector Element

In a typical CO2KK type Folded Dipole + Reflector NVIS system, the reflector wire is placed at not less than 1 meter (39 inches) above the ground, with 2 meters (78 inches) preferred.

The close proximity of the ground to the reflector element, together with the close asymmetrical proximity of the inverted-V shaped folded dipole, make it necessary to *tune the reflector to resonance*, using a lightly coupled grid-dip meter. (See Feb. 2000 CQ for "The Grid Dip Oscillator," p. 22, and "How to Build an LED Indicating Dipmeter," p. 26.—ed.)

If you plan to operate the NVIS antenna on the 40 meter band, select the segment that is most likely to be used during either your regular net operations or during emergencies. In my case the antenna's reflector was tuned for maximum gain at 7.1 MHz, which was almost perfectly achieved by tuning it to a frequency 5 percent lower than 7.1 MHz (6.745 MHz).

The length of the very close to the ground reflector element will depend on so many variables that my advice is for you to deal with each antenna as a special case, and tune the reflector to a frequency 5 percent lower than the resonant frequency of the folded-dipole element.

system antenna delivers a very strong signal during local daylight hours in the range from about 30 to 500 kilometers (20 to 300 miles), while its behavior during the ionospheric transitions that occur around sunrise and sunset make it particularly useful to keep communications running during emergencies.

No attempt was ever made to measure actual antenna gain, although the fact that it is a 2-element Yagi array with a closely spaced reflector could lead us to think that the NVIS Folded Dipole + Reflector should provide no less than 4 dB gain over a standard half-wave dipole installed at between 10 and 15 meters above ground level.

Additional Advantages

The NVIS system has other advantages, too. Among them, there is one which is also particularly convenient for emergency communications systems, and it is the fact that signals coming in at low-

incidence angles above the horizon are attenuated to an extent that makes reception of the desired high-angle signals much better—in other words, there is a definite advantage to installing the NVIS system, as the signals from nearby stations coming in at high-incidence angles are much stronger than those coming from DX stations.

In addition, the 7 MHz band system, using a folded-dipole radiator, can provide service on the 10.1 MHz band (30 meters), if the antenna is fed using open-wire line, something that might be useful for running a digital communications net on that band during the hours when NVIS signals are available on 30 meters.

You can also build a similar system for 80 meters, but this would require a much higher mast, which could be difficult to keep up in the middle of a hurricane, although the NVIS 3.5 to 4.0 MHz folded-dipole antenna would be ideal for Net Control Stations that operate sys-

tems handling regular (non-emergency) traffic.

What About Higher Frequencies?

NVIS systems are limited to operation at 10 MHz or below due to the fact that even a very highly ionized ionosphere will not support Near Vertical Incidence Skywave on higher frequencies. Very intense type-L sporadic-E layers sometimes send back to Earth signals on frequencies as high as 20 MHz, when the oblique incidence signals may propagate for brief periods on frequencies up to or even above 100 MHz. However, these do not occur often enough for the antennas to be reliable above 10 MHz.

Overall, the NVIS antenna should be strongly considered for any operator—such as an active traffic-handler or emergency communicator—who needs strong signals and reliable communications on 80, 40, or 30 meters with nearby stations within a range of 200 miles.

73, Arnie, CO2KK

References

Coro, Arnaldo, CO2KK, "Antena Acortada para 80 metros," *Revista Radioaficionados*, no. 1, 1987, pp. 18–19.

Preedy, Tone, G3LNP, "A compact and effective HF antenna," *HF Antenna Collection*, selected and edited by Erwin David, G4LQI, pp. 14–16, RSGB 1991 (reprinted 1994), UK.

DeMaw, Doug, W1FB, "Cloud Warmer Antennas," *W1FB's Antenna Notebook*, pp. 81–83, ARRL, 1987.

Heys, John D., G3DBQ, "Half Wave Dipoles," *Practical Wire Antennas*, Chapter 1, pp. 1–14, RSGB, reprinted 1991.

What About a 3-Element NVIS Beam?

Why not use the parasitic element as a *director* instead of a reflector? And...why not make the NVIS system a 3-element beam shooting straight up?

The first question is not too difficult to answer: A reflector mounted close to the ground is easier to deal with, will provide the required gain and bandwidth, and can be more easily accessible for tuning than a director mounted above the driven element!

Making the NVIS system a 3-element parasitic array will reduce the area of the ionosphere illuminated by the radiation pattern, something that is not desirable, as it will also reduce the effective service area of the antenna.

DOVETRON - STEALTH

U.S. PATENT 6,078,299

Dual Output RF Coupler operates in Quadrature from 1.8 to 54 MHz and provides Covert (anti-CC&R) low angle DX and high angle (NVIS) Near Vertical Incidence Sky waves with NO ANTENNA.

www.dovetron.com

Fon: 520-281-1681

Fax: 520-281-1684

Nogales, AZ 85628-6160

World's Best Selling

Amateur Radio License
Computer Aided
Instruction Software

\$39.95 \$4 Shipping

Learn right at your PC! 3.5 disks
and CD cover all written and Morse
code exams Tech through Extra. Review
all 1434 questions, take sample exams,
learn Morse code, build speed and more!
free Bonus...Part 97 Rule Book and 258
page question pool book!

CALL TOLL FREE The W5YI Group
1-800-669-9594 POB 565101
VISA/MC/DISC/AmEx Dallas, TX 75356



Cloud Warmer NVIS Antenna

In CQ May 2001 Arnie Coro CO2KK describes , in the regular Antennas column, an antenna system used during a hurricane net. The requirement was for good communications over an extended local area. The area was from 30 to 500 km from the base control station. The antenna design is for forty metres but a similar design can be employed on eighty metres by scaling the dimensions. A similar effect is achieved by the use of low slung dipoles or inverted vee antennas.

The design maximises radiation upward and the signal is then reflected by ionospheric layers and returned over a wide area around the station. This is ideal for emergency base stations or for nets. The technique is called Near Vertical Incidence Skywave or NVIS for short. You may have used it unintentionally but a little attention to the antenna system can maximise the results obtained.

The antenna is shown in Fig 1. Credit for Fig 1 from the CQ article is given to Olga Dalmau. The antenna consists of an Inverted Vee shaped folded dipole erected above a reflector element. The close spacing causes the basic dipole feedpoint impedance to fall to the 10 to 15 ohm region and the use of a folded dipole brings this back to between 40 and 60 ohms. A balun should be used and an air cored balun would be suitable. The reflector element is erected a minimum of 1 metre above ground and a 2 metre height is preferable. But check the EMR issue.

As the reflector is close to ground and is also very close to the dipole element you will need to tune it. This can be done simply using a dip meter lightly coupled to the reflector. Adjust the length to a frequency 5 % lower than the operating

frequency. For an operating frequency of 7.1 MHz the reflector should be tuned to resonate at 6.745 MHz. You can couple to the centre of the reflector by making a small temporary coupling loop at the centre of the reflector element. A one turn 25mm diameter loop will have minimal effect on the result.

The feed to the folded dipole can be coax and a balun should be used. An air core balun is simple to make and cheap. An air core balun will also not suffer from the effects of saturation of the core which can affect the operation of baluns using ferrite or powdered iron cores. An alternative is to use open wire line for the feeder with an antenna tuner. This may help with frequency excursions and allow operation on 10 MHz if required.

EMR considerations may cause you to

mount the reflector at a height above ground of between 3m for 3.5 MHz to 3.5m for 10 MHz operation for a 100 W SSB station using a speech compressor. For 400 W increase the height by another 1m to 1.5m. The closest approach here is to the back of the beam and hence more than 45 degrees off boresight and 2m is allowed for the height of a person. The upside of this is that people will not be tripping over the antenna. The dipole centre point would also need to be increased over that shown in Fig 1 to allow for the added height of the reflector. Alternatively restrict access to the antenna but this will require restricting access to a rectangular piece of land around the antenna. It may be easier to go up.

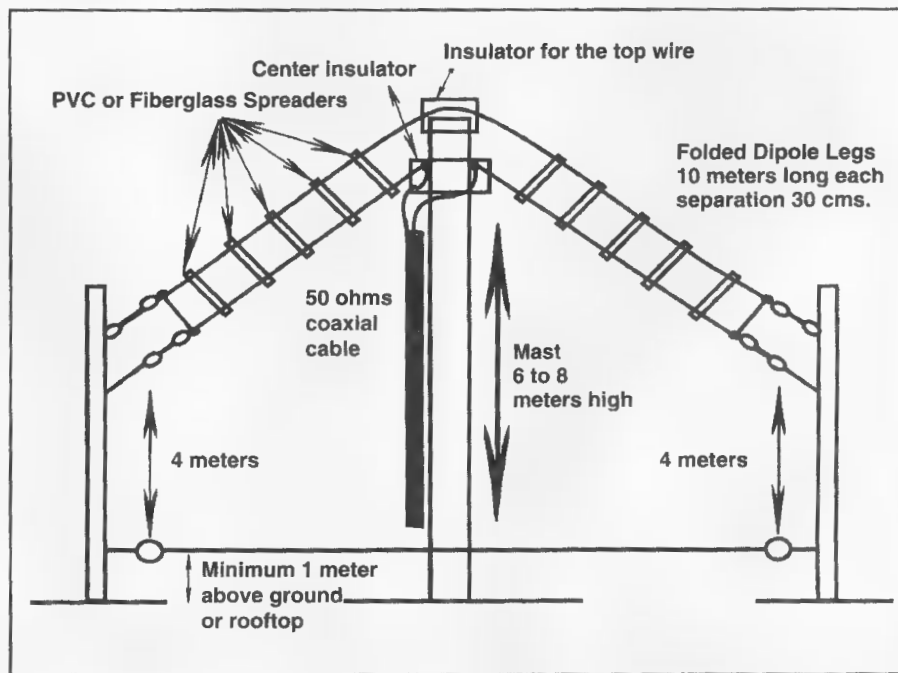


Fig 1 CO2KK's NVIS Antenna From CQ May 2001 drawn by Olga Dalmau.